



Roller Cradles



PIPELINE SOLUTIONS



BASIC DATA

SIZES/CAPACITY

	RC6-12*	RC12-24	RC24-36	RC36-48	RC48-60
Minimum outside (mm)	230	320	605	910	1215
Maximum Outside (mm)	440	620	925	1235	1550
Maximum lifting capacity (tons)	4/8	14	27	38	49

FRAME

Material	steel	steel	steel	steel	steel
Strings	1/2	2	2	2	2
Wire Rope Spreaders	2/4	4	4	4	4
Wire Rope Specifications	6x36D12	6x36D16	6x36D22	6x36D28	6x36D32

Tested In accordance with EKH

ROLLERS & SPRINGS

Number	16	20	24	28	36
Center	Welded steel	Welded steel	Cast Iron	Cast Iron	Cast Iron
Bearings	Ball	Ball	Ball	Ball	Ball
Shore hardness A	92	92	92	92	92

Covering: Adiprene

Springs: Compression Type

Compression set: 12% (70 hours at 23°C)

20% (24 hours at 70°C)

DIMENSIONS

Frame length (mm)	571	963	1340	1830	2150
Frame width (mm)	163/593	808	1104	1480	1776
frame height (mm)	350/381	525	735	950	1150
Weight (KG)	55/120	300	900	1950	3450

* The RC6-12 are available on one and two frame pipe model



SPECIFICATIONS

The Roller cradles are used in pipeline lay down operation. The rollers evenly distribute the pressure on the pipe, avoiding the risk of buckling the line pipe and preserving the coating.

The use of polyurethane rollers also eliminates the risk of damage the polyethylene or FBE pipe coating that can occur using regular steel wheel cradles.

In addition high standard ropes made in Italy are provided with the cradle in order to ensure long lasting life and safe operation at site.

The Euro Pipeline Equipments roller cradles can be disassembled easily for fast site repair and maintenance and optimized storage and transport.

The Euro Pipeline Equipment roller cradles comply with all applicable standards and are CE certified.

Range

6 inches to 60 inches.

Frame

High strength steel frame
Color Ral 1003 high gloss
Special color on request

Rollers

Dual ball bearings
Covering Adiprene
Special rollers on request

Wire rope

Construction 6x36WS+Stc
Surface galvanized
Length to fit max pipe size
Special lengths on request


Documentation

Certificate for frame
Certificate of wire ropes
CE Certificate
Instruction manual
Safety instruction



The herein shown dimensional drawings, technical data and performance charts of our manufactured pipelayer machines are to be deemed indicative. It is faculty of the manufacturer make some modifications of the proposed products, without any obligation of advanced notice.

AVAILABLE MODELS

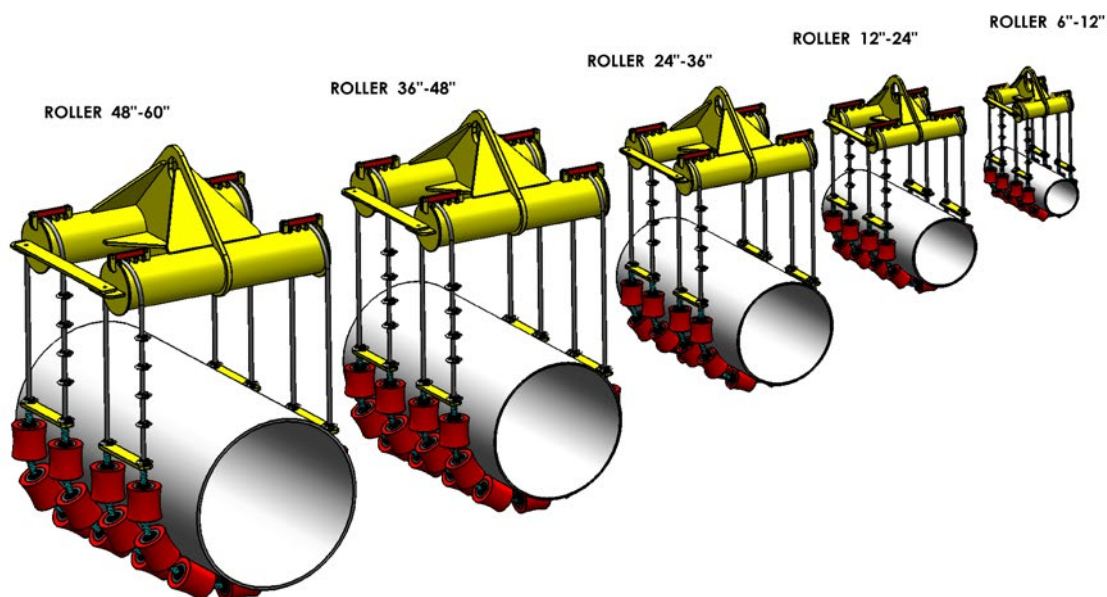

EURO PIPELINE EQUIPMENT SPA
Strada Provinciale 6 bis
Località Cascine Draghi
29013 Carpaneto Piacentino (PC)
ITALY

Registered Office
via Pontaccio 8
20121 Milan
ITALY

Telephone +39 0523 852064

info@europipeline-equipment.com

www.europipeline-equipment.com



PIPELINE SOLUTIONS